
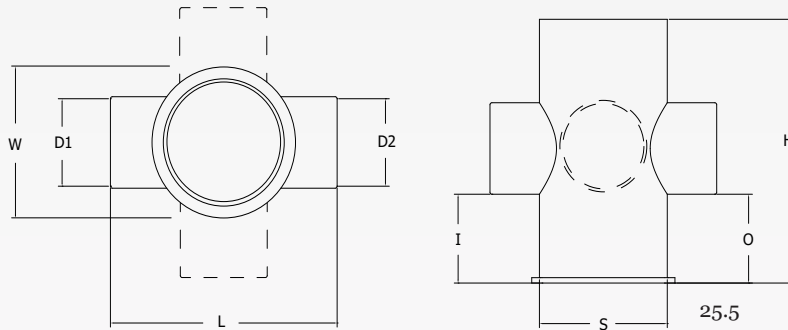


INSPECTION WELL

MODEL: GIW-BA

BASIN ONLY

PE

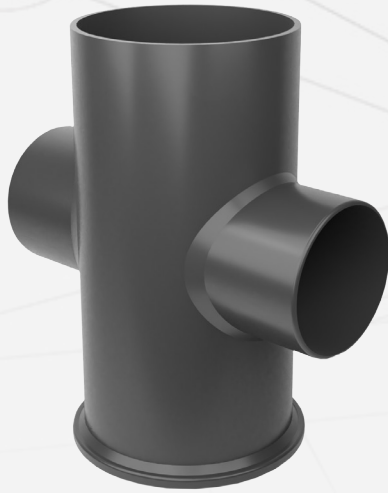

DESCRIPTION

Our fully customizable inspection well provides easy access to the sewer system for cleaning, maintenance and inspection purposes. They can be used in surface water, sewers, disposal systems and other aggressive environments.

They are very easy to open for inspection and maintenance purposes and are available in different sizes. These wells are easy to connect with spigots, flanges or rubber sleeves.


OPTIONAL

- Fully customizable
- Flange connection
- Up to 4 connections
- Heavy traffic cover
- Above ground installation

ADVANTAGES

- Design life of 50 years
- Easy access for maintenance
- Light weight (easy to install)
- High UV-protection
- Customization possible
- Easy to install
- Compact design

“CHOOSE YOUR OWN CONNECTIONS”



Model name	S inch	D1 inch	D2 inch	I inch	O inch	L inch	H inch	W inch	Weight lbs.
GIW-BA10-0412	ø 10	ø 4	ø 4	4.25	4.25	22.25	12.5	12.0	9
GIW-BA10-0424	ø 10	ø 4	ø 4	10.25	10.25	22.25	24.5	12.0	14
GIW-BA10-0612	ø 10	ø 6	ø 6	3.25	3.25	22.25	12.5	12.0	9
GIW-BA10-0624	ø 10	ø 6	ø 6	9.25	9.25	22.25	24.5	12.0	14
GIW-BA12-0412	ø 12	ø 4	ø 4	4.25	4.25	22.25	12.5	14.0	10
GIW-BA12-0424	ø 12	ø 4	ø 4	10.25	10.25	22.25	24.5	14.0	16
GIW-BA12-0612	ø 12	ø 6	ø 6	3.25	3.25	22.25	12.5	14.0	10
GIW-BA12-0624	ø 12	ø 6	ø 6	9.25	9.25	22.25	24.5	14.0	16
GIW-BA12-0812	ø 12	ø 8	ø 8	2.25	2.25	22.25	12.5	14.0	10
GIW-BA12-0824	ø 12	ø 8	ø 8	8.25	8.25	22.25	24.5	14.0	16
GIW-BA12-1024	ø 12	ø 10	ø 10	7.25	7.25	22.25	24.5	14.0	17
GIW-BA16-1224	ø 16	ø 12	ø 12	6.25	6.25	22.25	26.5	18.0	26

All dimensions and weights are approximate and are not guaranteed.